
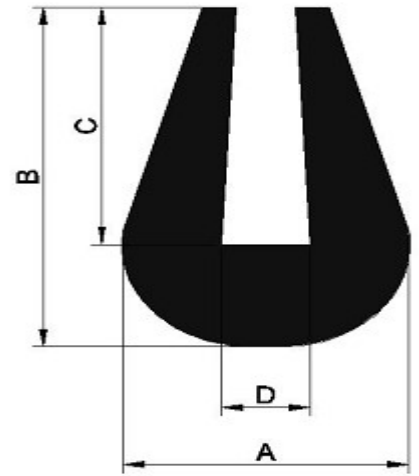
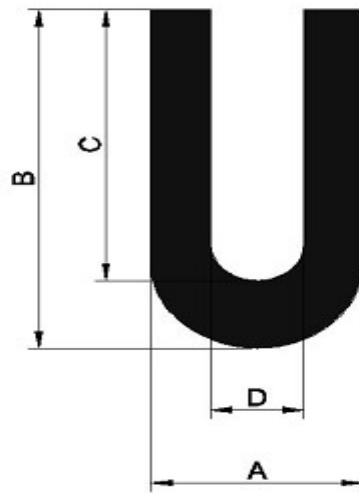


Vedantes conforme desenho

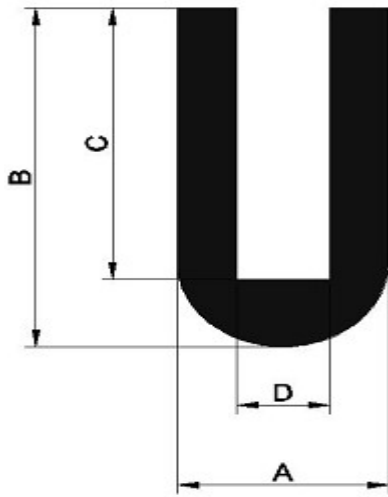

flexiprene

fábrica de perfis de borracha

Ref:	Dimensões aproximadas em mm							Sh.A	Tolerancias
	A	B	C	D					
2658	25,7	31	23	11				65/70	Din-ISO 3302 E2
2663	13,6	27,5	21,6	5,5				65/70	Din-ISO 3302 E2
2667	6	9	7	3				65/70	Din-ISO 3302 E2
2680	42,6	32	20	32				65/70	Din-ISO 3302 E2
2702	11	32	28	3,5				65/70	Din-ISO 3302 E2
2707	14,5	23,5	14,5	3,5				65/70	Din-ISO 3302 E2
2708	12	25	15	6,5				65/70	Din-ISO 3302 E2
2720	15,5	28	24	8				65/70	Din-ISO 3302 E2
2758	18,2	16,5	10,5	5,3				65/70	Din-ISO 3302 E2
2779	28	25,6	11	8,2				65/70	Din-ISO 3302 E2
2782	36,5	52,5	38	9				65/70	Din-ISO 3302 E2
2807	12	26,3	23	5				65/70	Din-ISO 3302 E2
2885	35	47	34,5	12				65/70	Din-ISO 3302 E2
2906	29	26,5	15	8,5				65/70	Din-ISO 3302 E2
2927	36,5	55	40	20,5				65/70	Din-ISO 3302 E2
2990	40,8	31,2	21,5	20,5				65/70	Din-ISO 3302 E2
3007	25,5	43,5	29	10,6				65/70	Din-ISO 3302 E2
3038	32,5	51,2	31,2	9				65/70	Din-ISO 3302 E2
3052	35	55	35	10,2				65/70	Din-ISO 3302 E2
3060	23,2	42,5	30	8,2				65/70	Din-ISO 3302 E2
3183	30	42	30	10,5				65/70	Din-ISO 3302 E2
3205	12	25,5	15,5	6,5				65/70	Din-ISO 3302 E2
								65/70	Din-ISO 3302 E2
								65/70	Din-ISO 3302 E2
								65/70	Din-ISO 3302 E2